




P-Type Mono Bifacial Cell

MS-MSC166-6D9B

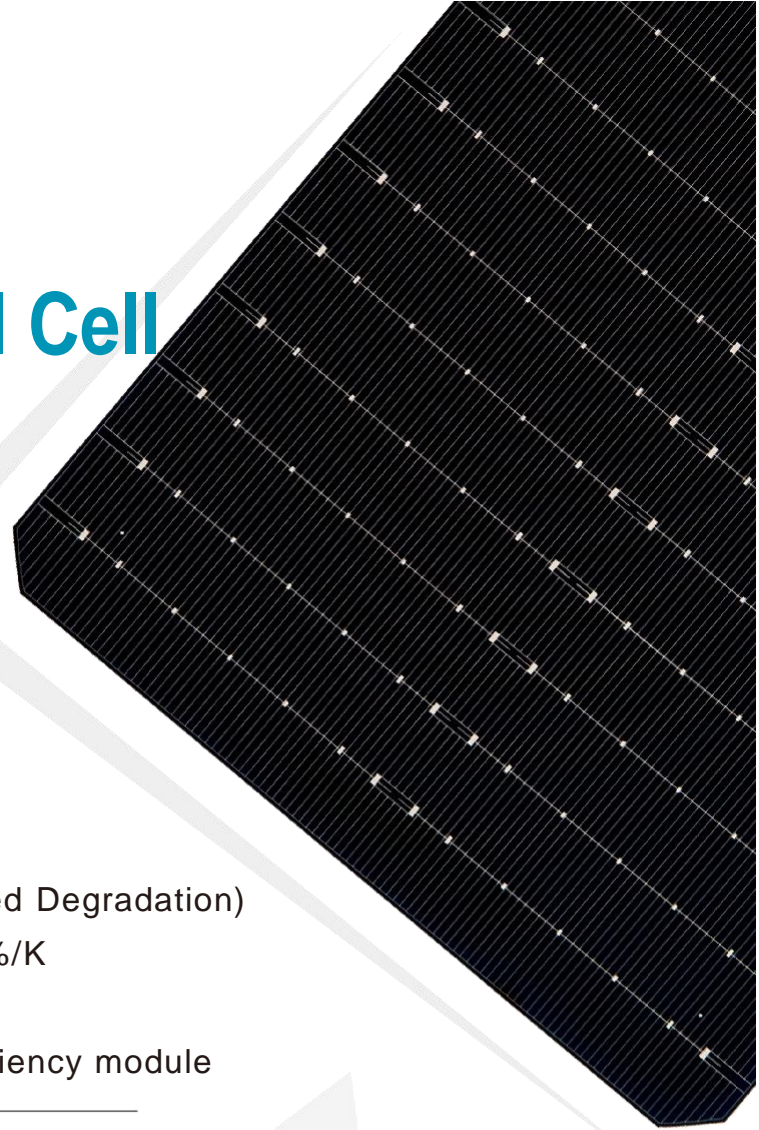

Product Feature

- High conversion efficiency $\geq 23.0\%$
 - Bifaciality $\geq 70\%$
 - LID (Light Induced Degradation) $\leq 2.5\%$
 - High resistance of PID (Potential Induced Degradation)
 - Power temperature coefficient $\leq -0.35\%/K$
 - Weak light response ($200W/m^2$) $\geq 95\%$
 - Lower CTM loss, better for the high efficiency module
-



Quality Control

- Efficiency test accuracy is $\pm 0.1\%$
 - 100% automatic inspection of IV/EL/Appearance
 - Calibration Cell source to Fraunhofer ISE
-



Management System Certification

- ISO 9001:2015 Quality Management System
 - ISO 14001:2015 Environmental Management System
 - ISO 45001:2018 Occupational Health and Safety Management System
-

Product Features

| | |
|----------------|---|
| Dimension | 166mmx166mm±0.25mm, Φ223mm±0.25mm |
| Cell Thickness | 175μm±20μm |
| Front side | 0.06±0.03mm wide bus bars, 128 fingers, SiN |
| Back side | 1.8±0.4mm discontinuous back electrode(6 sections) 144 Aluminum fingers, SiN |

Temperature Coefficients


| | |
|---------------------------------|-----------------------|
| Current Temperature Coefficient | Tkcurrent: +0.048 %/K |
| Voltage Temperature Coefficient | Tkvoltage: -0.28%/K |
| Power Temperature Coefficient | Tkpower: -0.35 %/K |

Electrical Data


| Eff(%) | Pmpp(W) | Ump(V) | Imp(A) | Uoc(V) | Isc(A) | FF(%) |
|--------|---------|--------|--------|--------|--------|-------|
| 23.0 | 6.31 | 0.594 | 10.615 | 0.688 | 11.212 | 81.74 |
| 22.9 | 6.28 | 0.592 | 10.605 | 0.687 | 11.199 | 81.60 |
| 22.8 | 6.25 | 0.590 | 10.594 | 0.686 | 11.196 | 81.38 |
| 22.7 | 6.22 | 0.588 | 10.584 | 0.685 | 11.182 | 81.25 |
| 22.6 | 6.20 | 0.587 | 10.555 | 0.684 | 11.161 | 81.16 |
| 22.5 | 6.17 | 0.585 | 10.544 | 0.683 | 11.145 | 81.03 |
| 22.4 | 6.14 | 0.584 | 10.515 | 0.682 | 11.128 | 80.92 |
| 22.3 | 6.11 | 0.583 | 10.486 | 0.681 | 11.115 | 80.81 |
| 22.2 | 6.09 | 0.582 | 10.457 | 0.680 | 11.076 | 80.77 |
| 22.1 | 6.06 | 0.581 | 10.428 | 0.679 | 11.060 | 80.68 |
| 22.0 | 6.03 | 0.580 | 10.399 | 0.678 | 11.034 | 80.62 |

• Standard Test Conditions: 1000W/ m², AM 1.5, 25°C Specifications and data are only for reference.

IV Curve

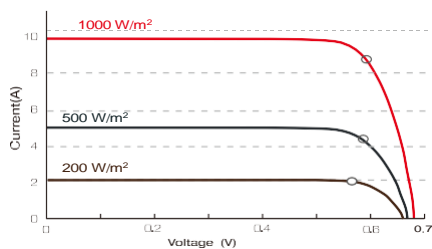

Dimension

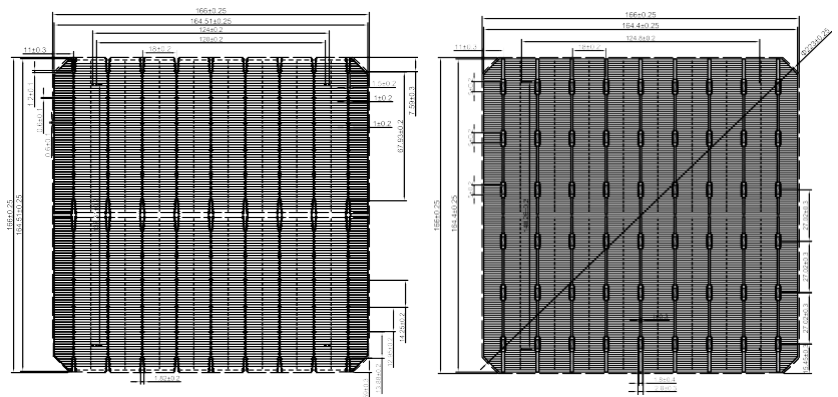

Front side

Rear side

Spectral Response (SR)

